



SINCE 1974

# Flameproof & Weatherproof Twin Aviation Obstruction Light

## ● Technical Data : LW 51200

### ENCLOSURE :

Ex-d, GAS Gr. IIA, IIB & IIC AS PER IS/IEC 60079-1 & IS/IEC 60079-0

### PROTECTION :

IP-66 AS PER IS/IEC 60529

### AREA CLASSIFICATION :

ZONE-1, 2, 21 & 22

### CERTIFICATION :

CIMFR/TC/SR/1546

### MATERIAL OF CONSTRUCTION :

PRESSURE DIE CAST ALUMINUM ALLOY

### RATING & TEMP. CLASSIFICATION :

7/15W LED LAMP, 240V AC/ 24V DC - T6

### TRANSPARENT PART :

HEAT, RESISTANT & TOUGHENED CLEAR DOME GLASS

### LAMP HOLDER :

PORCELAIN E27

### FINISH :

DARK ADMIRALTY GREY EPOXY POWDER COATED SHADE 632 AS PER IS:5

### HARDWARE :

STAINLESS STEEL

### EARTHING :

1 No. INSIDE & 2 Nos. OUTSIDE

### CABLE ENTRY :

M20 x 2 Nos.

### LAMP :


RED MEDIUM INTENSITY LED LAMP WITH E27 THREADED CAP, 7/15W, 230V AC

### NOTE :

1 FLASHING/ NON-FLASHING



SINGLE

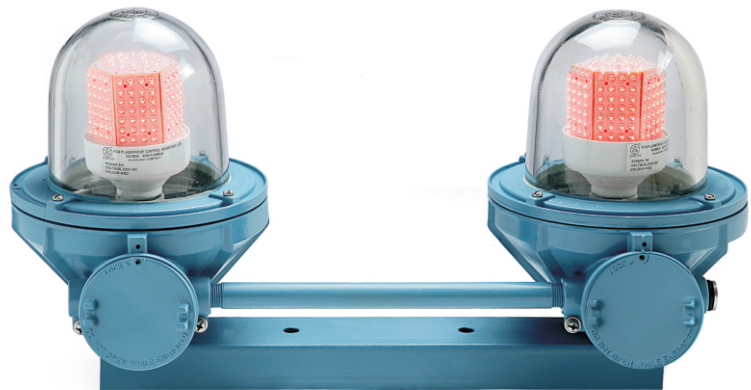

TWIN

