



SINCE 1974

Flameproof & Weatherproof Multiway Junction Box

● Technical Data : IJ 61100

PROTECTION :

IP-66 AS PER IS/IEC 60529

CERTIFICATION NO :


CIMFR/TCC/SR/H55

TERMINALS :

CLIPON TYPE 2.5 Sq. mm x 8 Nos. Max.

CABLE ENTRY :

M20 x 4 Nos. AS A STANDARD THREE SIDE
M20 x 1 No. & AT BOTTOM
M20 x 2 Nos. ON REQUEST

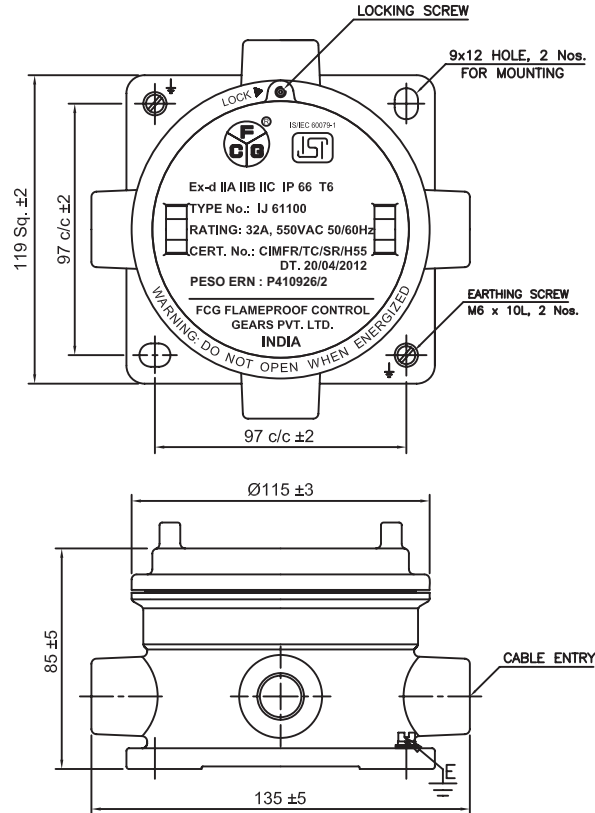

● Technical Data : IJ 61125

PROTECTION :

IP-66 AS PER IS/IEC 60529

CERTIFICATION NO :

CIMFR/TC/SR/06

TERMINALS :

AS PER CLIENT REQUIREMENT
(CLIPON TYPE 2.5 Sq. mm x 10 Nos. Max.)

CABLE ENTRY :

M20 x 8 Nos. MAX.

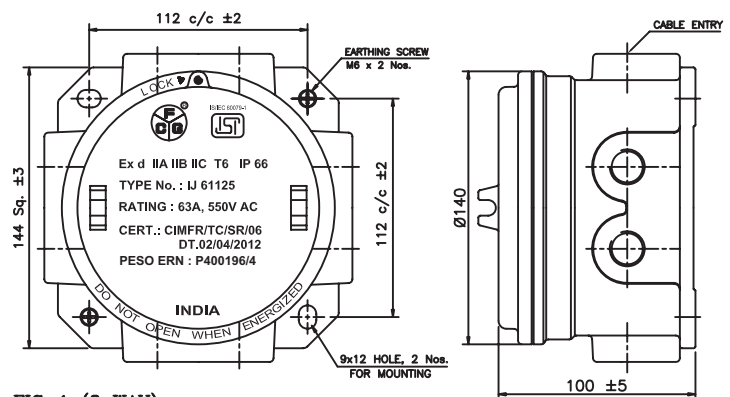


FIG-1 (8 WAY)

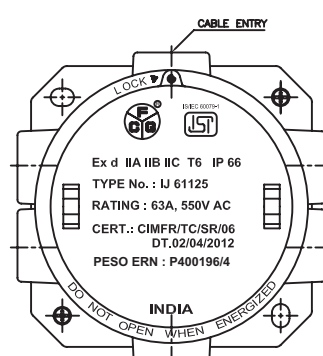


FIG-2 (6 WAY)

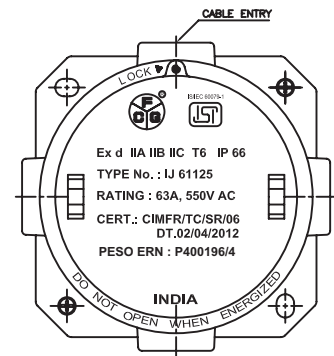


FIG-3 (4 WAY)