



SINCE 1974

Flameproof & Weatherproof Dol Starter Upto 15 Hp & Starter Upto 10 HP With Isolator

● Technical Data : PA 61000

PROTECTION :

IP-65/66 AS PER IS/IEC 60529

CERTIFICATION :


CIMFR/TC/SR/797
CIMFR/TC/SR/1474

COMPONENTS :


- A) CONTACT ELEMENT 10A, 415V AC
- B) STOP PUSH BUTTON RED MUSHROOM HEAD WITH PADLOCKING ARRANGEMENT - 1 No.
- C) START PUSH BUTTON GREEN SHROUDED - 1 No.
- D) CONTACTOR - 1 No.
- E) THERMAL OVER LOAD RELAY - 1 No.
- F) TERMINALS, CLIPON TYPE RAIL MOUNTED - 6 Nos.

CABLE ENTRY :


M20 x 03 Nos.

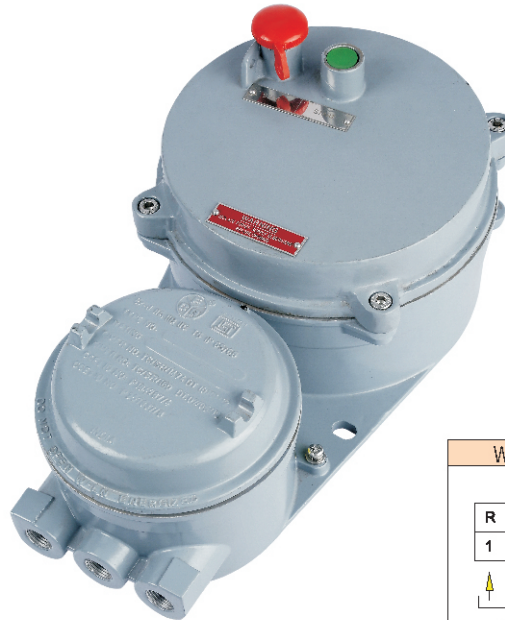

WIRING DIAGRAM



WITHOUT ISOLATOR

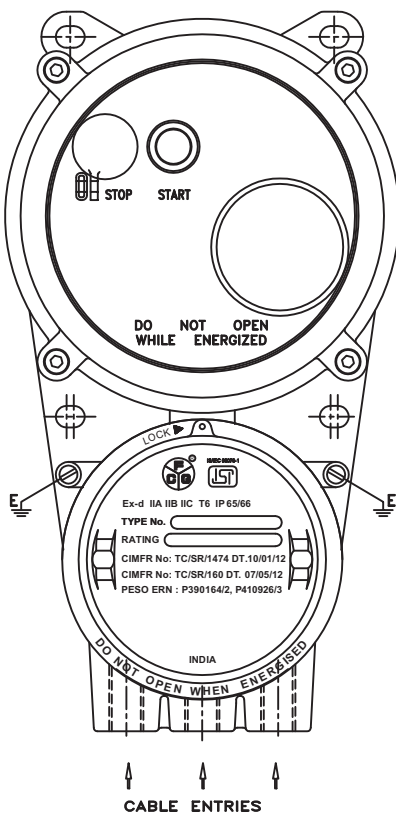

WITH ISOLATOR

