



SINCE 1974

Weatherproof Start + Stop Push Button & Switch

● Technical Data : WLC 12 22 903

CERTIFICATION :



CIMFR/TC/P/H734

COMPONENT :

- A) CONTACT ELEMENT 10A, 415V, AC / 1A, 250V, DC
- B) STOP PUSH BUTTON, STAY PUT TYPE RED MUSHROOM HEAD WITH WITHOUT KEY LOCKABLE 1NC / 2NC CONTACT - 1 No.
- C) START PUSH BUTTON GREEN SHROUDED WITH 1NO / 2NO CONTACT - 1 No.
- D) A-O-M SELECTOR SWITCH UPTO 25A - 1 No.
- E) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq.mm x 7 Nos.
Max. TERMINALS 2.5 Sq.mm x 12 Nos.

CABLE ENTRY :

M20 x 2 Nos

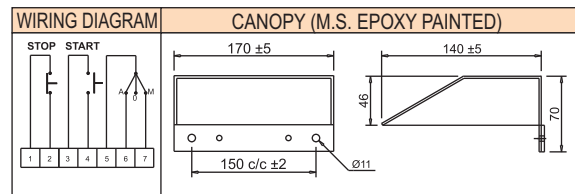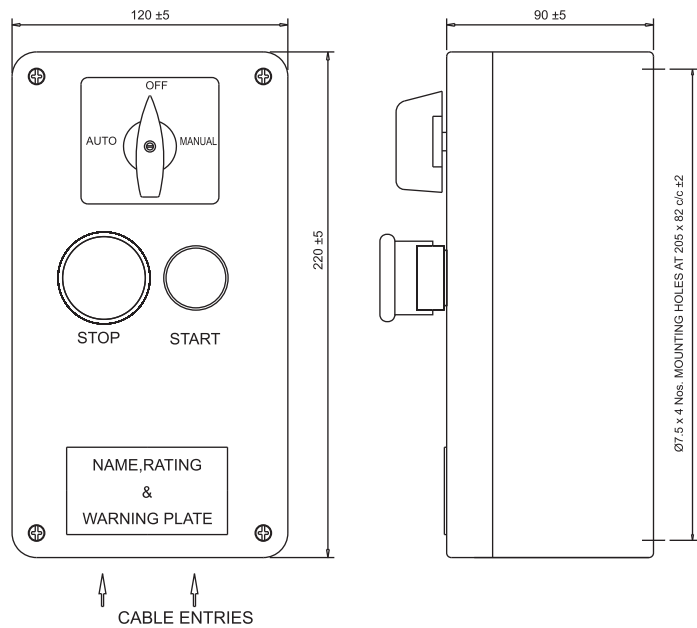

Weatherproof Start + Stop + Forward + Reverse Push Button Station

| Technical Data : WLC 12 22 904

CERTIFICATION :

CIMFR/TC/P/H734

COMPONENT :

- A) CONTACT ELEMENT 10A, 415V, AC / 1A, 250V, DC
- B) STOP PUSH BUTTON, STAY PUT TYPE RED MUSHROOM HEAD WITH WITHOUT KEY LOCKABLE 1NC / 2NC CONTACT - 1 No.
- C) START, FORWARD, REVERSE PUSH BUTTON GREEN SHROUDED WITH 1NO / 2NO CONTACT - 3 Nos.
- D) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq.mm x 8 Nos.
Max. TERMINALS 2.5 Sq.mm x 12 Nos.

CABLE ENTRY :

M20 x 2 Nos

