



SINCE 1974

# Weatherproof LCS with Two Switch

## ● Technical Data : WLC 12 22 905

### CERTIFICATION :



CIMFR/TC/P/H734

### COMPONENT :

- A) 32A SELECTOR SWITCH A-O-M SP/DP - 2 Nos.
- B) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq.mm x 6 Nos.
- Max. TERMINALS 2.5 Sq.mm x 12 Nos.

### CABLE ENTRY :

M20 x 2 Nos.

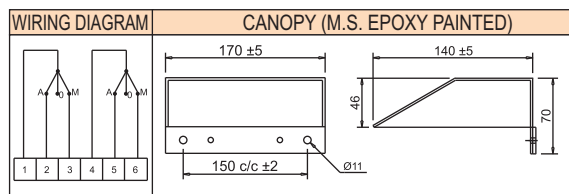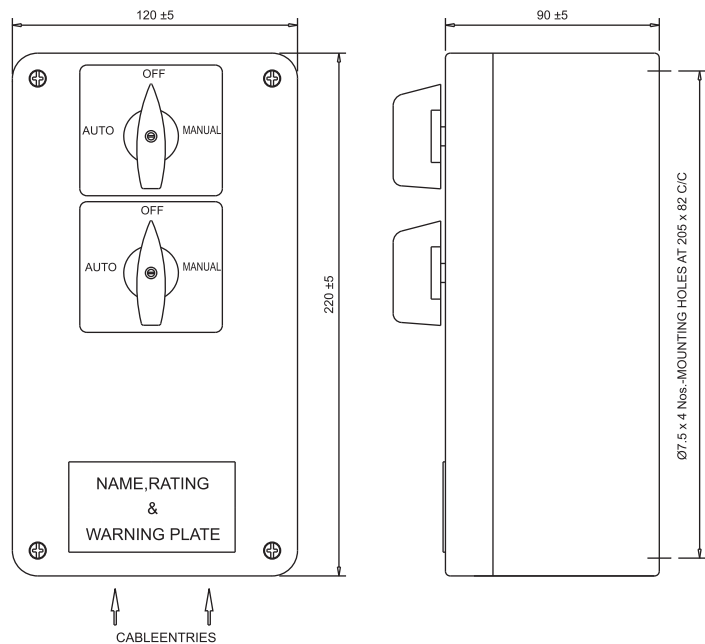

# Weatherproof Start + Stop Push Button with Switch & Ammeter

## ● Technical Data : WLC 16 26 901

### CERTIFICATION :

CIMFR/TC/P/H734

### COMPONENT :

- A) CONTACT ELEMENT 10A, 415V, AC / 1A, 250V, DC
- B) STOP PUSH BUTTON, STAY PUT TYPE RED MUSHROOM HEAD WITH WITHOUT KEY LOCKABLE 1NC / 2NC CONTACT - 1 No.
- C) START PUSH BUTTON GREEN SHROUDED WITH 1NO / 2NO CONTACT - 1 No.
- D) A-O-M SELECTOR SWITCH, UPTO 25A, SP/DP - 1 No.
- E) AMMETER / VOLTMETER - 1 No.
- F) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq.mm x 9 Nos.
- Max. TERMINALS 2.5 Sq.mm x 20 Nos.

### MOUNTING :

WALL MOUNTING

### CABLE ENTRY :

M20 x 2 Nos. (AS STANDARD)

M20 x 3 Nos. (AS REQUEST)

