



SINCE 1974

Weatherproof LCS with 2 Switch & Ammeter

● Technical Data : WLC 16 26 902



CERTIFICATION :
CIMFR/TC/P/H734

COMPONENT :

- A) AUTO-OFF-MANUAL SP/DP SELECTOR SWITCH SP/DP - 2 Nos.
- B) AMMETER / VOLTMETER - 1 No.
- C) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq. mm x 8 Nos.
Max. TERMINALS 2.5 Sq.mm x 20 Nos.

CABLE ENTRY

- M20 x 2 Nos. (AS STANDARD)
- M20 x 3 Nos. (AS ON REQUEST).

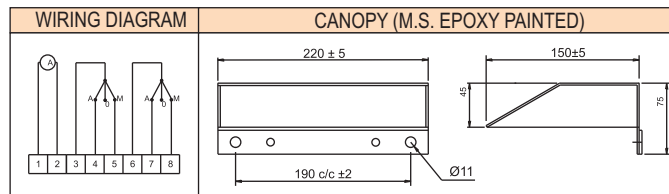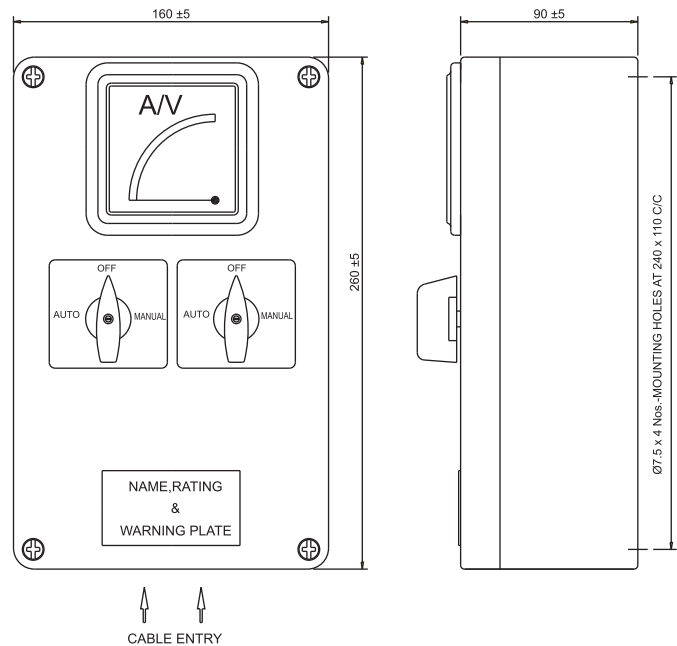

Weatherproof Start + Stop Push Button with Ammeter

● Technical Data : WLC 16 26 903

CERTIFICATION :
CIMFR/TC/P/H734

COMPONENT :

- A) CONTACT ELEMENT 10A, 415V, AC / 1A, 250V, DC
- B) START PUSH BUTTON, GREEN SHROUDED WITH 1N0/2N0 CONTACT- 1 No.
- C) STOP PUSH BUTTON, STAY PUT TYPE RED MUSHROOM HEAD WITH WITHOUT KEY LOCKABLE 1NC / 2NC CONTACT - 1 No.
- D) AMMETER / VOLTMETER - 1 No.
- E) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq. mm x 6 mm.
Max. TERMINALS 2.5 Sq.mm x 20 Nos.

CABLE ENTRY :

- M20 x 2 Nos. (AS STANDARD)
- M20 x 3 Nos. (AS REQUEST).

