



SINCE 1974

# Weatherproof LCS with Ammeter & 3 Nos. Push Button

## ● Technical Data : WLC 16 26 904

### CERTIFICATION :



CIMFR/TC/P/H734

### COMPONENT :

- A) CONTACT ELEMENT 10A, 415V, AC / 1A, 250V, DC
- B) STOP PUSH BUTTON, STAY PUT TYPE RED MUSHROOM HEAD WITH/ WITHOUT KEY LOCKABLE 1NC / 2NC CONTACT - 1 No.
- C) FORWARD, REVERSE PUSH BUTTONS, GREEN SHROUDED WITH 1NO/2NO CONTACT-02 Nos.
- D) AMMETER / VOLTMETER - 1 No.
- E) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq. mm x 8 Nos.  
Max. TERMINALS 2.5 Sq. mm x 20 Nos.

### CABLE ENTRY :

- M20 x 2 Nos. (AS STANDARD)
- M20 x 3 Nos. (AS REQUEST).

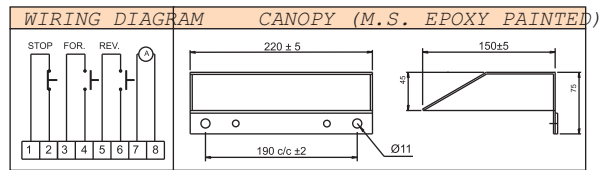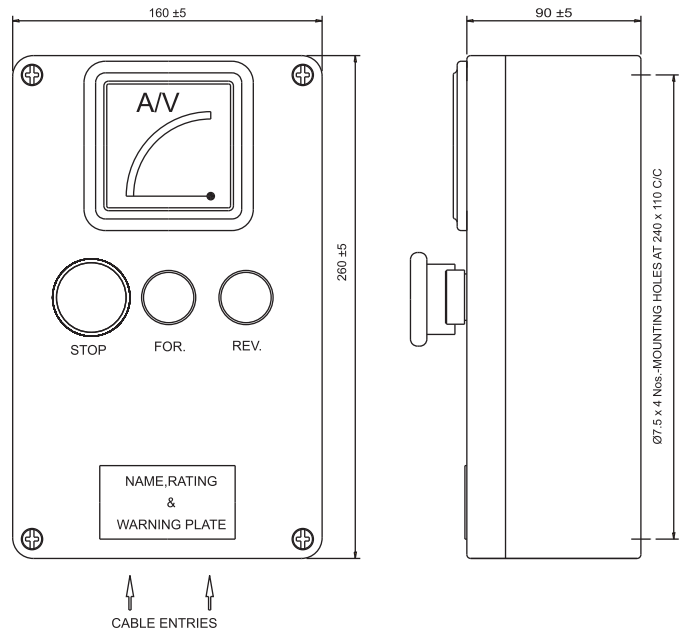

# Weatherproof LCS with 2 Switch & 4 Nos. Push Button

## ● Technical Data : WLC 16 26 905

### CERTIFICATION :



CIMFR/TC/P/H734

### COMPONENT :

- A) CONTACT ELEMENT 10A, 415V, AC / 1A, 250V, DC
- B) STOP PUSH BUTTON, STAY PUT TYPE RED MUSHROOM HEAD WITH/ WITHOUT KEY LOCKABLE 1NC / 2NC CONTACT - 1 No.
- C) START PUSH BUTTON, GREEN SHROUDED WITH 1NO CONTACT - 03 Nos.
- D) A-O-M SELECTOR SWITCH 32A, SP/DP - 02 Nos.
- E) MICRO TERMINALS, CLIPON TYPE RAIL MOUNTED 2.5 Sq. mm x 14 Nos.  
Max. TERMINALS 2.5 Sq. mm x 20 Nos.

### CABLE ENTRY :

- M20 x 2 Nos. (AS STANDARD)
- M20 x 3 Nos. (AS REQUEST).

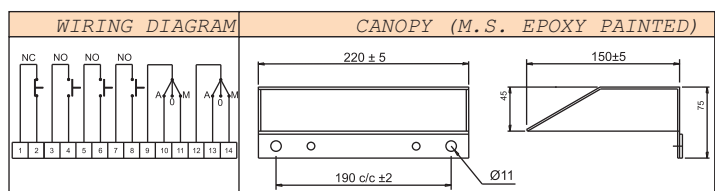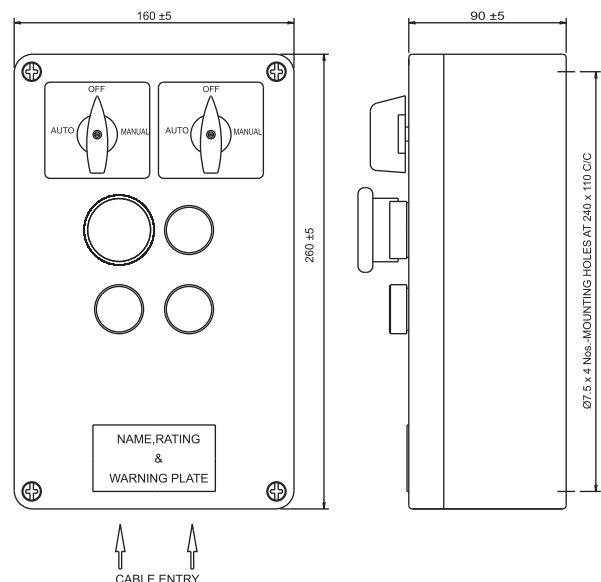

CIMFR/PESO/BIS