

SYT -7



SYD - 20A



SYE - 150A




SYT 102 R

MM ²	E Bolt MMø	øA	øC	D	F	B	K	G-H	J	Dowell's CAT. No.	SYD 20A	SYE 150 A	SYE 150 B	SYT 7	SYT-102 R
150	M16	16.1	21.2	30.5	5.2	70.5	10.0	55.4	151.5	ALS-701	JDR-12	JER-12	JEA-150	JEK-403	JEM-271
240	M12	21.5	28	41.0	6.0	64.0	14.0	62.3	164.8	ALS-702	JDR-15	JER-15	JEA-240	JEK-406	JEM-273
300	M16	24	31	45.0	7.0	99.5	16.2	77.6	211.5	ALS-703	JDR-16	JER-16	JEA-300	JEK-407	JEM-274
300	M20	31	45.0	7.0	99.5	16.2	77.6	211.5	ALS-704						
300	M16	25	32	46.3	7.0	105	14.0	70.0	218.0	ALS-705		JER-21	JEA-630		
630	M20	36	46	65.9	10.0	100	16.0	104	255.0	ALS-706					

ALUMINIUM FERRULES FOR ALUMINIUM XLPE CONDUCTORS

dowells cat No	Conductor Size mm ²	øA	øC	J
ALS-XL1	25	7.2	9.6	82
ALS-XL2	35	8.3	11.1	90
ALS-XL3	50	10.1	13.5	100
ALS-XL4	70	10.2	14.5	104
ALS-XL5	95	12.0	16.9	108
ALS-XL6	120	13.7	19.0	112
ALS-XL7	150	15.1	21.2	116
ALS-XL8	185	16.6	23.9	128
ALS-XL9	225	18.6	26.1	136
ALS-XL10	240	19.3	27.2	148
ALS-XL11	300	21.8	30.2	160
ALS-XL12	400	25.0	34.8	182
ALS-XL13	500	28.2	39.1	190
ALS-XL14	630	31.7	44.4	200
ALS-XL15	800	35.7	49.5	225
ALS-XL16	1000	41.0	56.0	250

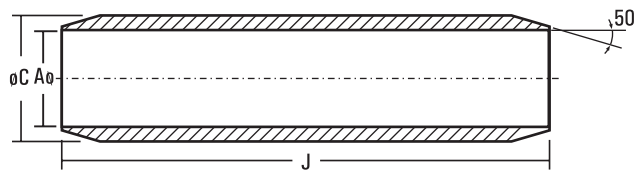

FINISH : NATURAL