

SYT- 2

SYT- 50

SYT- 9


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

MM ²	E Bolt MMØ	ØA	D	B	G	L-1	Dowell's CAT. No.	RECOMMENDED TOOLS & DIES				STD PKG
								SYB 95	SYD 20A	SYE 150A	SYT 185	
10	M5	4.3	10	8	5	17	RS-7025					
10	M5	4.3	10	8	5	15	RS-7026	SYT-2				
10	M6	4.3	12	8	6	17	RS-7120	JBR-1				200
10	M8	4.3	16	8	8	19	RS-7121					
10	M10	4.3	22	8	11	23	RS-7123					
10	M12	4.3	22	8	11	23	RS-7028					
16	M5	5.6	10	10	5	19	RS-7124					
16	M6	5.6	12	10	6	20	RS-7029	SYT-2				
16	M8	5.6	16	10	8	22	RS-7030	JBR-2				200
16	M10	5.6	22	10	11	24	RS-7128					
16	M12	5.6	22	10	11	24	RS-7033					
25	M6	7.5	12	11	6	25	RS-7156					
25	M8	7.5	16	11	8	22	RS-7034					
25	M10	7.5	22	11	11	31	RS-7132	JBR-5				100
25	M12	7.5	22	11	11	31	RS-7037					
35	M6	9.0	16	12	8	23	RS-7133					
35	M8	9.0	16	12	8	23	RS-7038					
35	M10	9.0	22	12	11	31	RS-7135	JBR-6			R-6	100
35	M12	9.0	22	12	11	31	RS-7040					
50	M8	10.5	18	16	9	34	RS-7136					
50	M10	10.5	22	16	11	32	RS-7137					
50	M12	10.5	24	16	12	36	RS-7042	JBR-7			R-7	100
50	M16	10.5	32	16	16	38	RS-7139					
70	M10	12.0	22	18	11	36	RS-7140					
70	M12	12.0	24	18	12	36	RS-7141	JBR-9			R-9	50
70	M16	12.0	28	18	14	40	RS-7142					
95	M10	13.5	24	20	12	38	RS-7144					
95	M12	13.5	24	20	12	38	RS-7044	JBR-10			R-10	50
95	M16	13.5	28	20	14	44	RS-7145					
120	M12	15.0	26	22	13	39	RS-7146					
120	M16	15.0	32	22	16	48	RS-7147	JBR-11	JDR-11	JER-11	R-11	30
120	M20	15.0	40	22	20	52	RS-7148					
150	M12	16.5	34	24	17	49	RS-7149					
150	M16	16.5	34	24	17	49	RS-7045		JDR-13	JER-13		20
150	M20	16.5	40	24	20	54	RS-7046					

MATERIAL -EC GRADE COPPER IS -191

TOLERANCE=± 5%

FINISH : ELECTRO TINNED

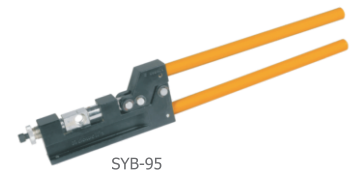

SYB-95



SYD-20



SYE- 150